



# PANORAMA® SLATE 30



INTERIOR VIEW



Comparison of performance on 1/4" (6mm) thick clear glass.

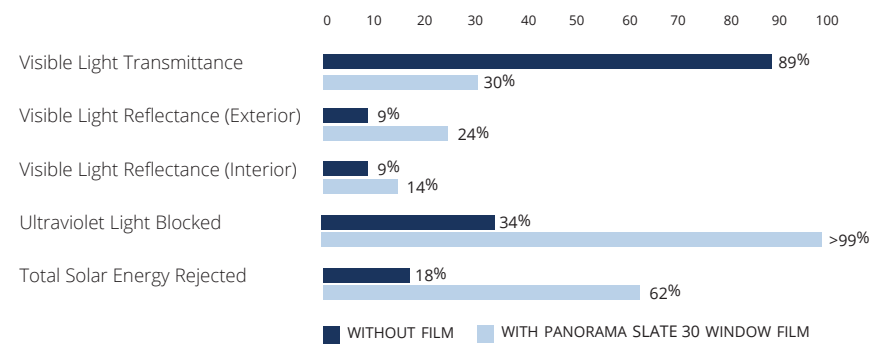


## PANORAMA® SLATE 30

Slate 30 offers substantial heat and glare reduction, added privacy and adequate natural light. This film is lightly tinted, hardly noticeable from inside, with a soft reflective finish outside.

The Dual-Reflective Slate Series offers exceptional solar rejection performance with a more neutral finish. These films maintain views with reduced interior and exterior reflectance, while increasing privacy by day, and offering minimal reflectivity at night. The Slate Series is ideal for applications where glare is a primary consideration.

# PANORAMA® SLATE 30



EXTERIOR VIEW

## Performance Parameters for Different Window Types

	1/8" (3mm) Single clear		1/4" (6 mm) Single clear		1/8" (3mm) Double clear		1/4" (6mm) Double clear	
	No film	Slate 30	No film	Slate 30	No film	Slate 30	No film	Slate 30
<b>Visible light</b>								
Transmittance %	90	30	89	30	81	27	79	27
Reflectance exterior %	9	24	9	24	16	29	15	27
Reflectance interior %	9	14	9	14	16	15	15	15
Glare reduction %	0	67	0	67	0	66	0	66
<b>Solar Energy</b>								
Total solar energy rejected %	14	63	18	62	24	53	30	53
Solar heat gain coefficient	.86	.37	.82	.38	.76	.47	.70	.47
<b>Energy distribution</b>								
Transmittance %	83	23	77	21	69	19	61	17
Absorptance %	9	48	16	54	18	53	27	60
Reflectance %	8	29	7	25	13	28	12	23
<b>Thermal energy</b>								
Emissivity	.84	.84	.84	.84	.84	.84	.84	.84
Winter U-factor (Btu hr/ft <sup>2</sup> °F)	1.04	1.04	1.02	1.02	.48	.48	.47	.47
<b>Fade control</b>								
UV Tdw-ISO @ 300 to 700 nm %	85	23	82	23	74	21	70	20
Fade reduction %	0	73	0	72	0	72	0	71
Ultraviolet light blocked @ 300 to 380 nm %	27	>99	34	>99	41	>99	50	>99



1. Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.  
 2. Performance results for glare and fade reduction are calculated by comparing filmed glass to that of untreated glazing.

ONLY AVAILABLE THROUGH A PANORAMA DEALER  
 For full details and additional information please visit [www.solargard.com/panorama](http://www.solargard.com/panorama).

SK0314PANSL3 09/20  
 © Copyright 2020, Saint-Gobain  
 High Performance Solutions and/or its affiliates

All Rights Reserved • [www.solargard.com](http://www.solargard.com)

Please recycle

